

Verderflex

Rapide R3S



VERDERFLEX®

Verderflex Rapide R3S Specifications

Standard Speeds	60, 113, 151 & 220 RPM
Control	Inverter Optional
Multi-channel	up to 4 channels (when factory built)
Voltage	230/400V 50Hz (Single Phase Available to special order)
Installed Motor Power	0.37 kW 50Hz
Protection Class	IP55
Standard Tube Options	Verderprene, Silicone
Tube Size	3.2 x 2.4 mm, 4.8 x 2.4 mm, 6.4 x 2.4 mm, 8.0 x 2.4 mm, 9.6 x 2.4 mm
Weight	16.5 kg

Flow Rates


Tube	RPM	Flow ml/min	Flow l/hr
4.8 x 2.4	60	200	12
4.8 x 2.4	113	400	24
4.8 x 2.4	151	600	36
4.8 x 2.4	220	800	48
6.4 x 2.4	60	400	24
6.4 x 2.4	113	750	45
6.4 x 2.4	151	1000	60
6.4 x 2.4	220	1400	84
8.0 x 2.4	60	600	36
8.0 x 2.4	113	1100	66
8.0 x 2.4	151	1400	84
8.0 x 2.4	220	2000	120
9.6 x 2.4	60	750	45
9.6 x 2.4	113	1400	84
9.6 x 2.4	151	1850	111
9.6 x 2.4	220	2700	162

Nominal pump speed based on 50Hz operation
Note: 3.2 x 2.4 mm tubing available



Flows are typical and were measured with water at 20°C with no suction lift or discharge pressure. Actual flows will vary according to suction conditions, discharge pressure, tube material and production tolerances.



Verderflex Rapide R3S

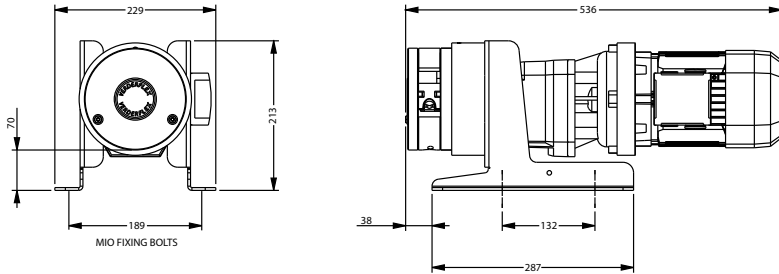

All dimensions are in mm.
All dimensions and weights are for guidance only.

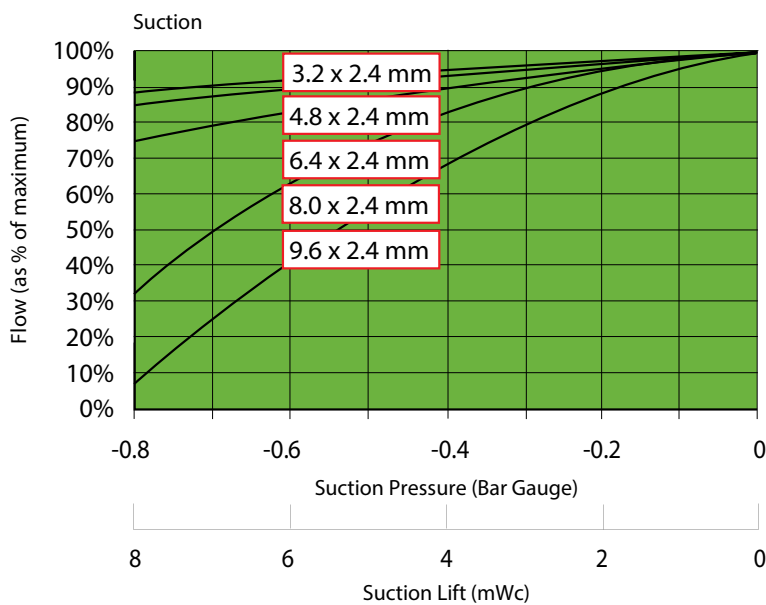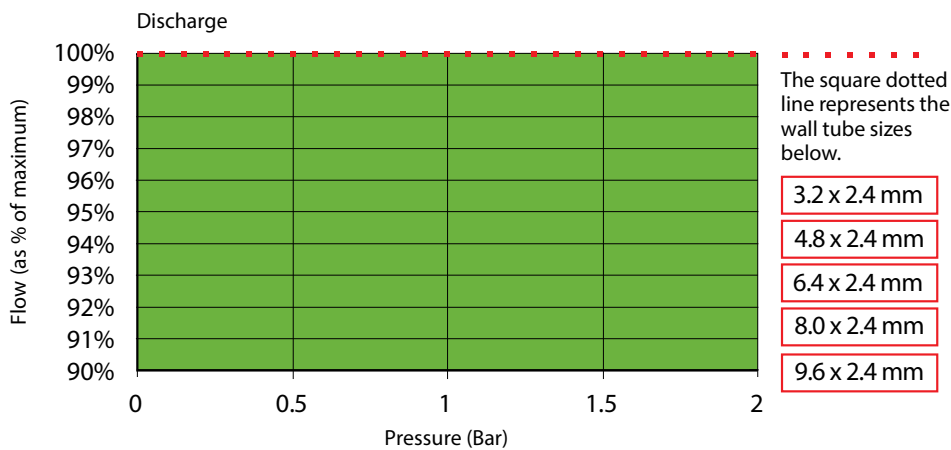

**Find your local supplier
at www.verderflex.com**

For construction installation and floor mounting drawings
please contact your local authorised Verderflex® distributor.